

v6W/P



Removable SSD



Dedicated Space
for Peripherals



IP54 Whole Unit

SENOR

Senor v6WP Series Intelligent Touch POS Terminal


Senor v6WP Series is designed to meet the functional requirements of the users as well as having the modern appeal to enhance varied ambiances of the operating environment.

The design concept complements a user's workflow and operation of the POS unit thereby increasing productivity and efficiency. A variety of POS accessories is available, including optional customer display screen and tool free interchangeable coloured bezel.

With its **elegant design**, v6WP is ideally suited for the retail and hospitality industries' flagship and pop-up stores.




I/O Connector

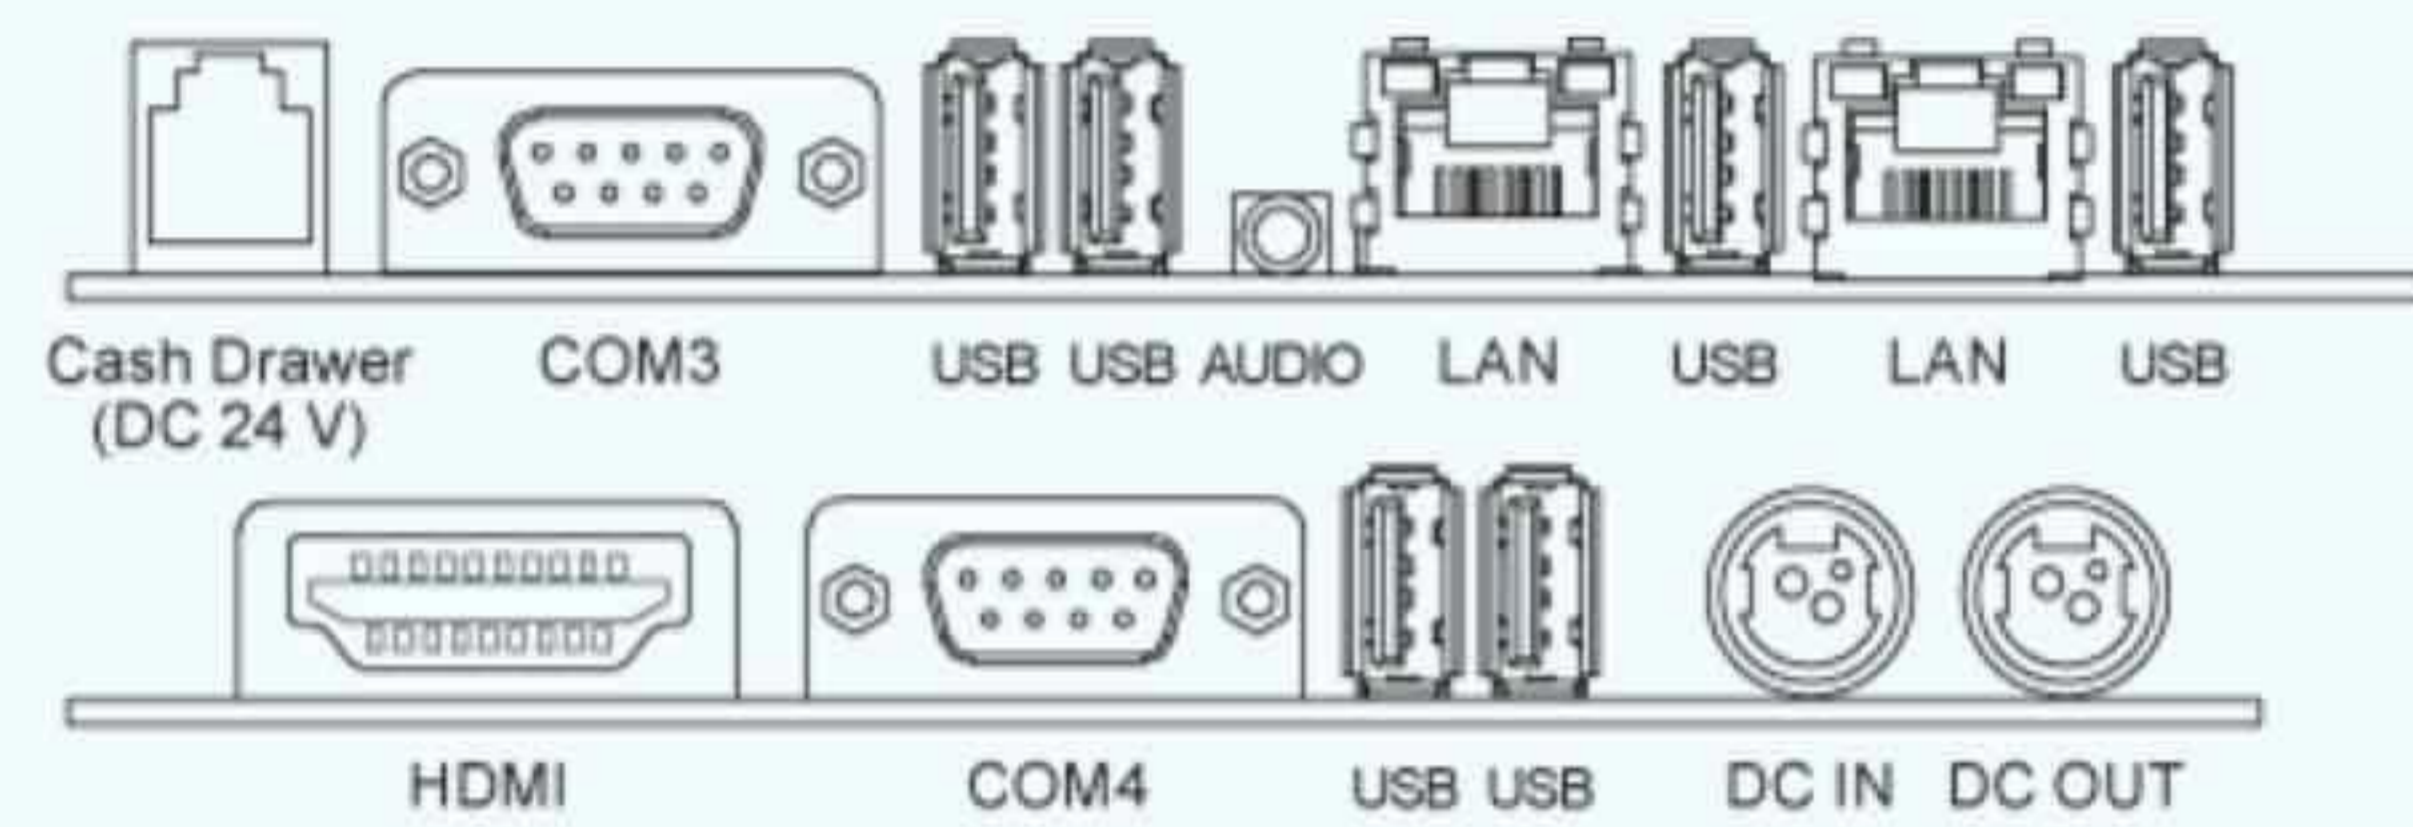


v6WP Type A (Standard)

2 x Serial | 6 x USB | 2 x LAN | 1 x HDMI
1 x Cash Drawer

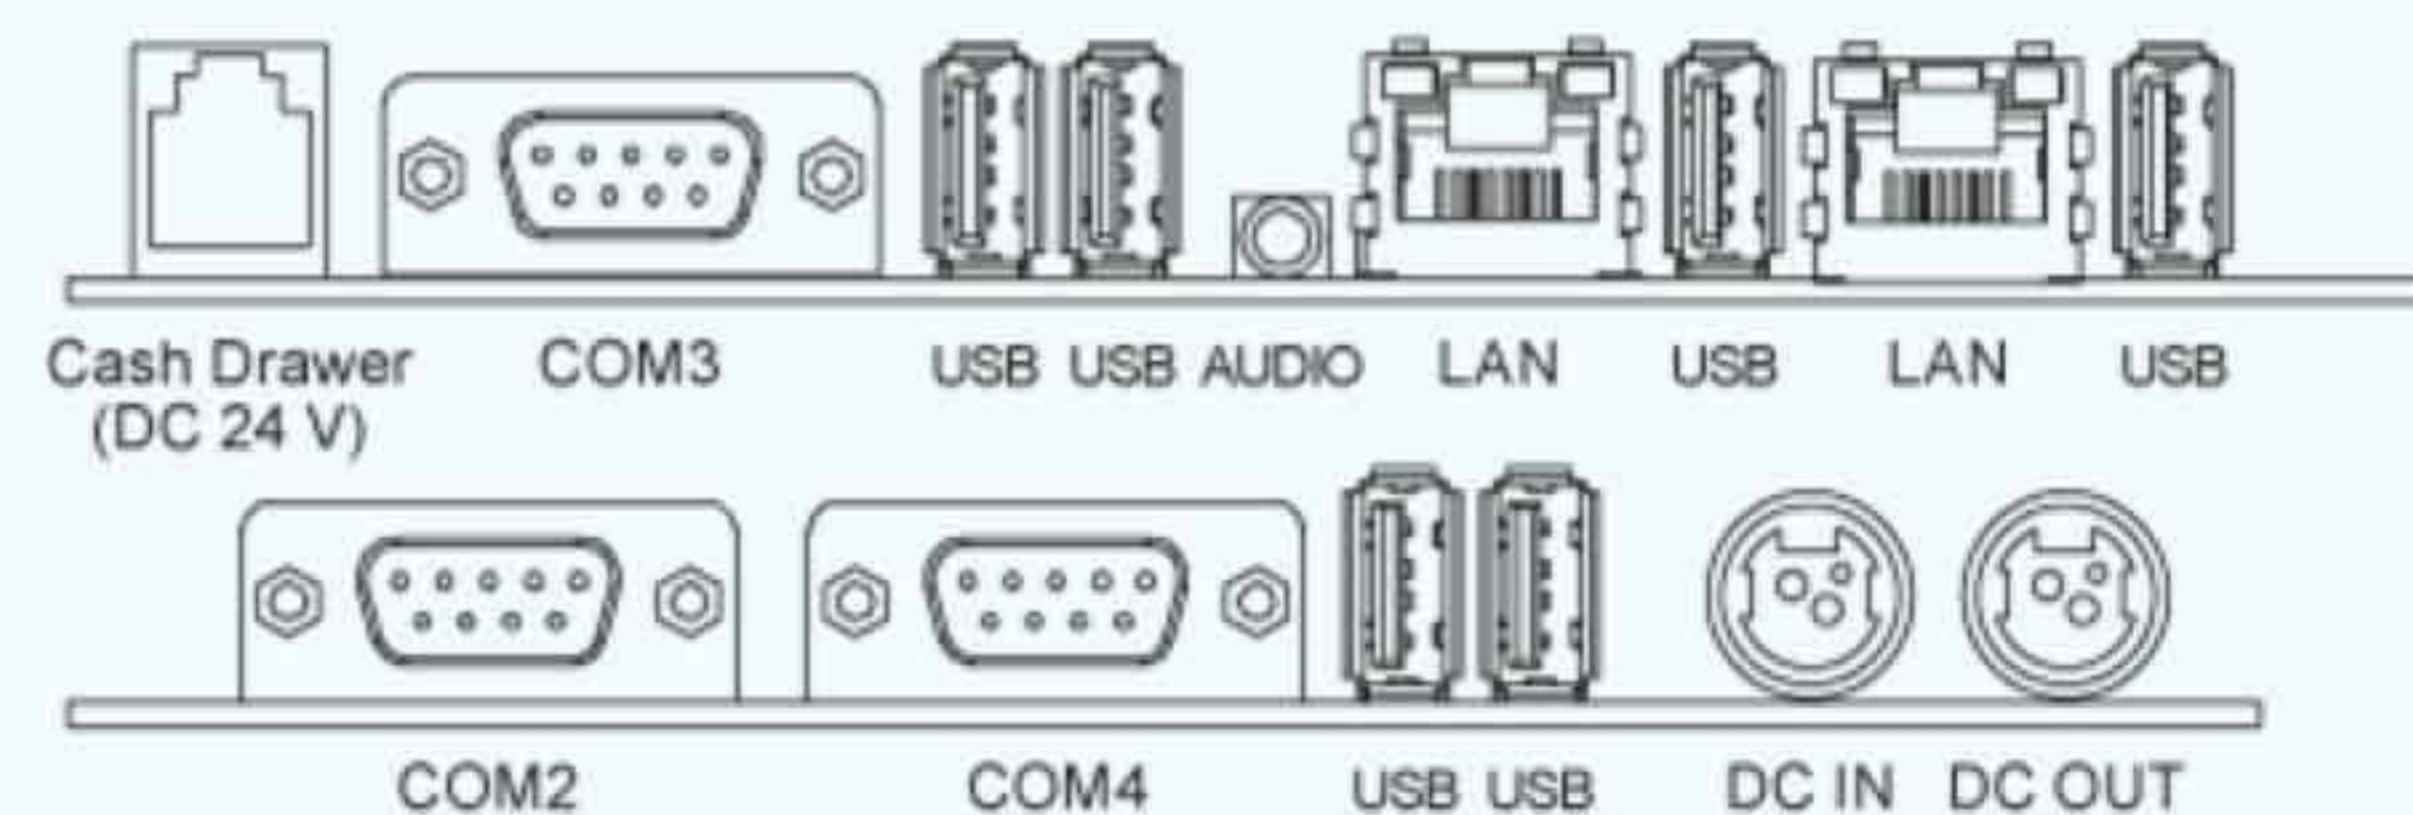


v6WP Type B

3 x Serial | 6 x USB | 2 x LAN
1 x Cash Drawer

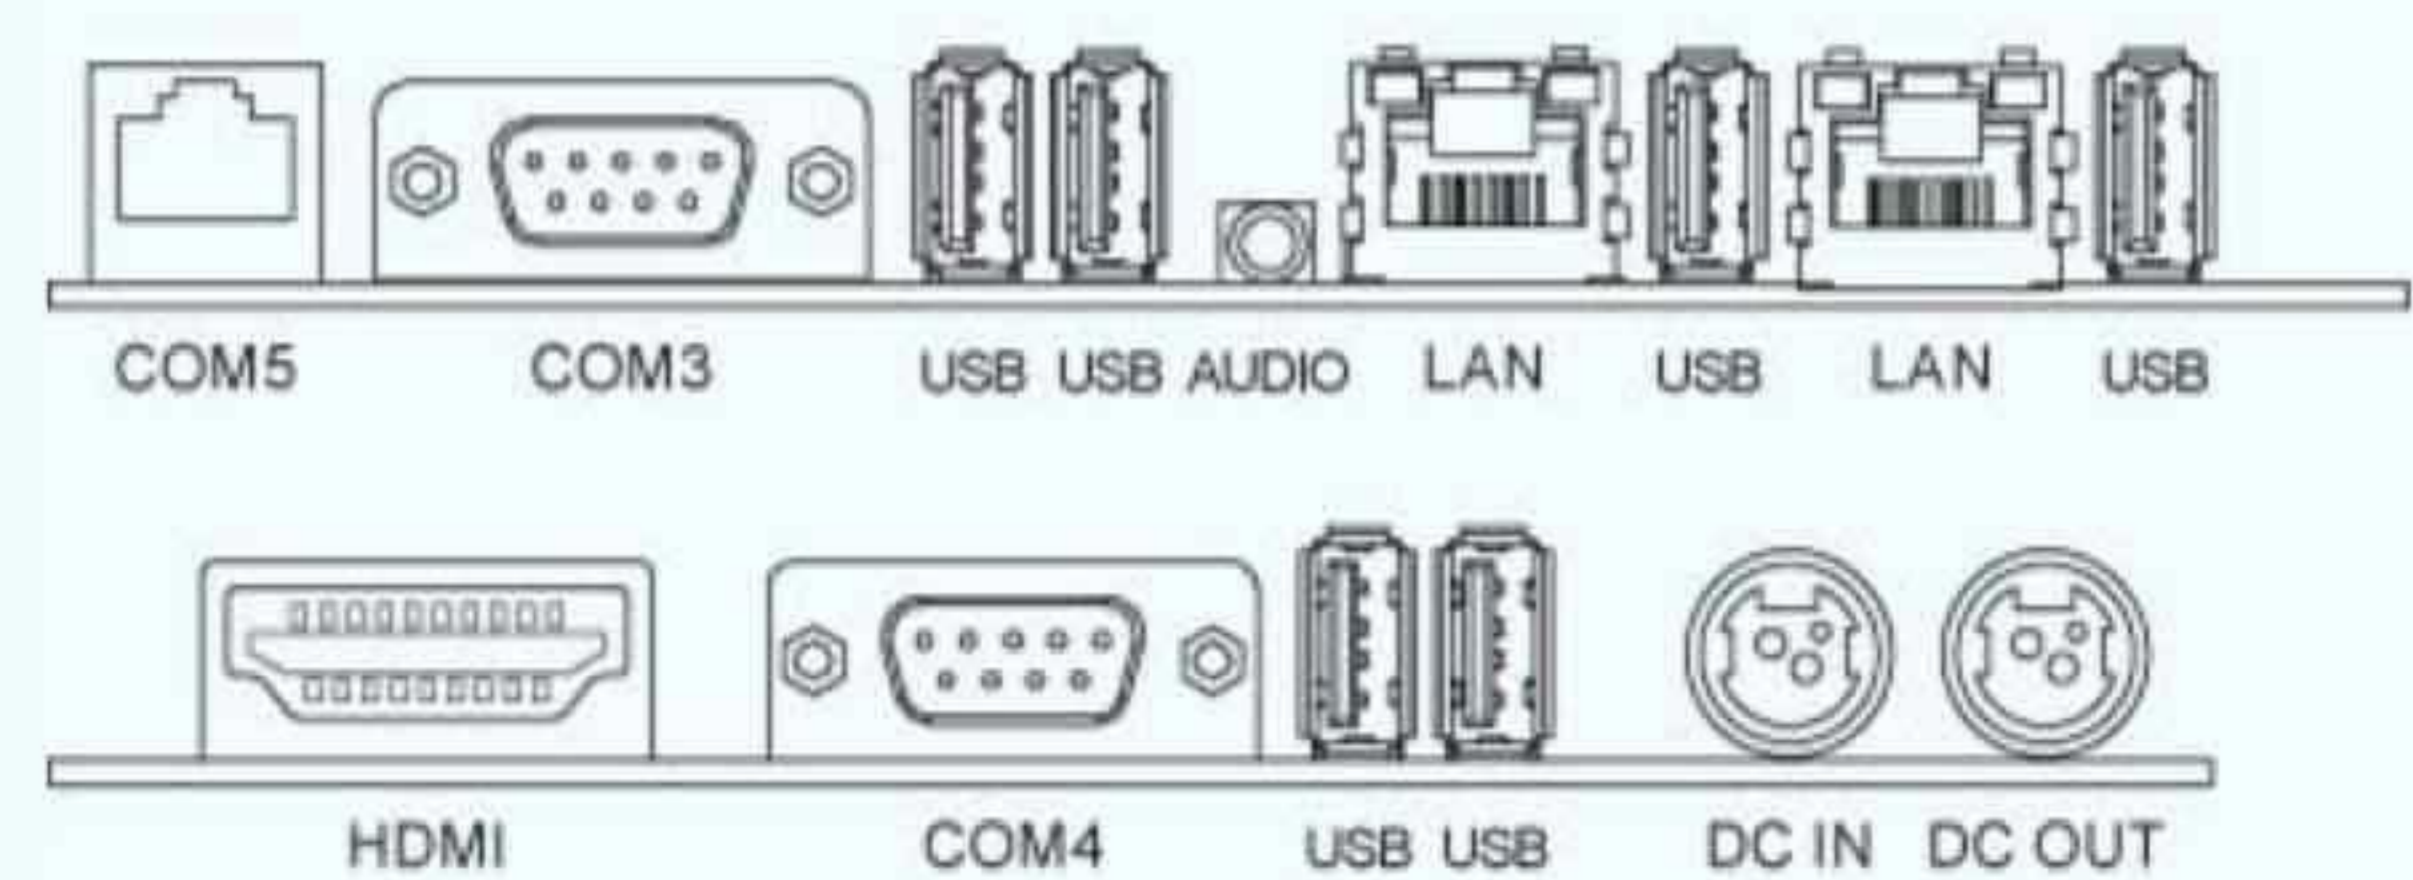

v6WP Type C

3 x Serial | 6 x USB | 2 x LAN | 1 x HDMI

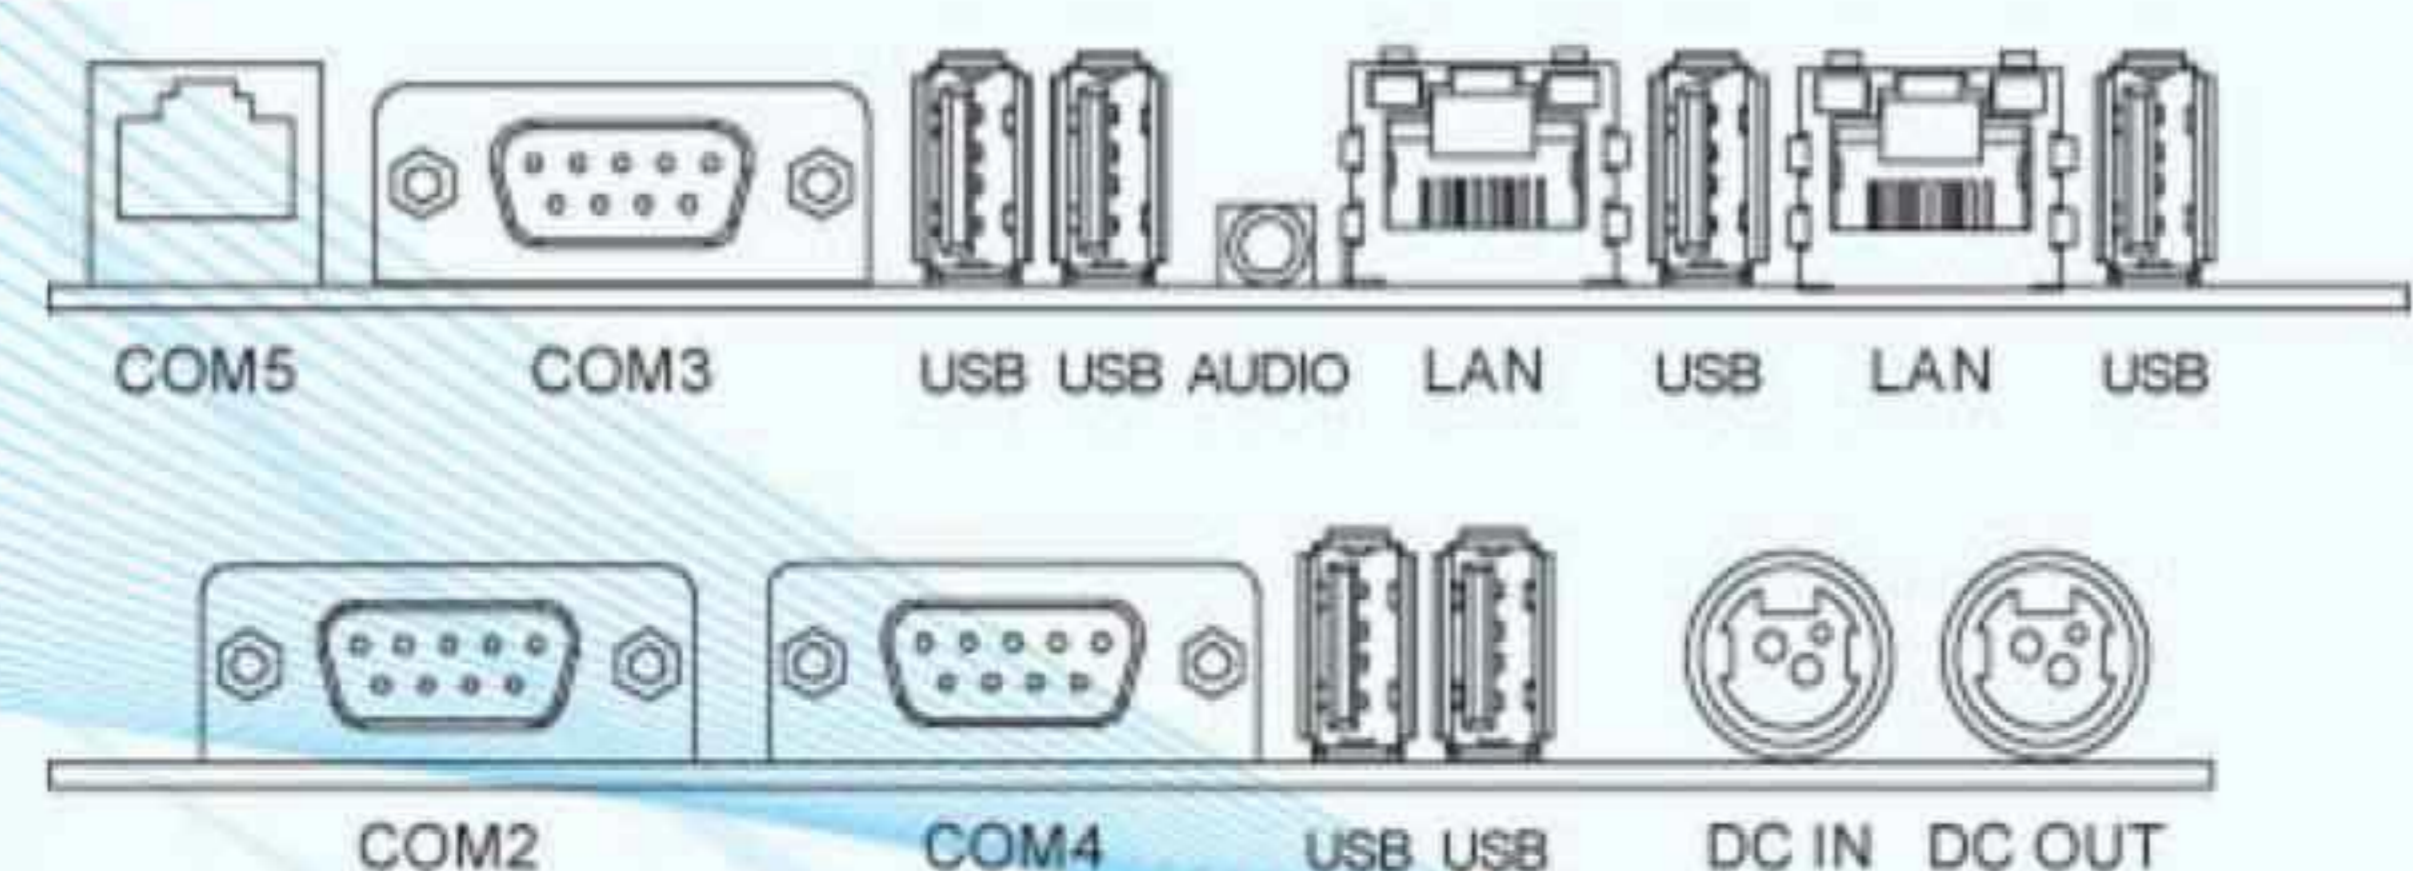

v6WP Type D

4 x Serial | 6 x USB | 2 x LAN

Optional Accessories



MSR / Fingerprint / RFID Reader




VFD / 10" / 15" Customer Display



Coloured Frame*/Housing*



Upward / Downward Customer Display

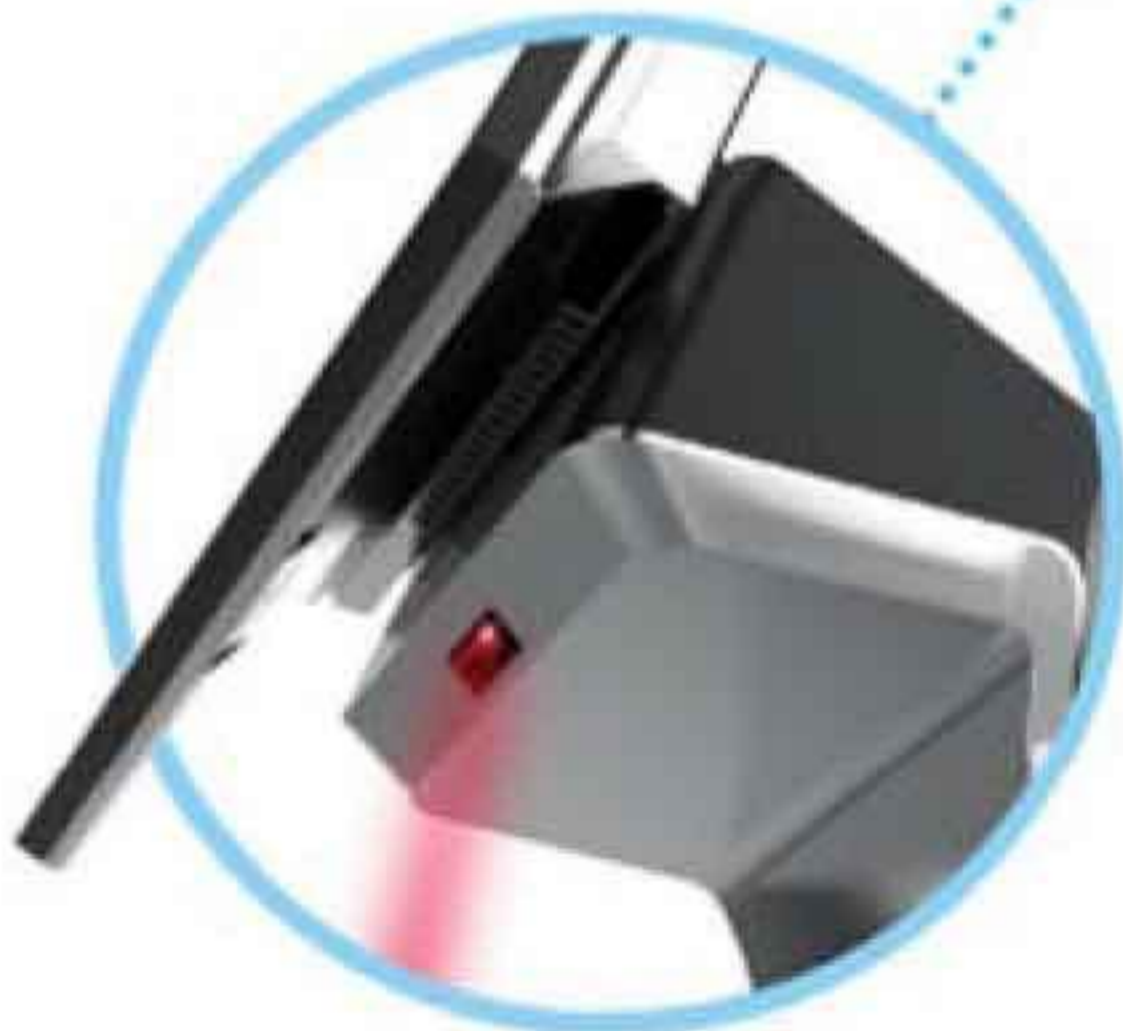

Integrated 2D Barcode Scanner



Integrated Printer/Scanner



2D Barcode Scanner / RFID (NFC)



7" LCD / Customised Logo

Features



60 Degree Tilt Adjustment



Internal Power Supply Cable Management System



Fanless / Screwless

* Coloured units are by special order only.



SPECIFICATIONS

v6WP X75

PROCESSOR	Intel Core i7-6700TE 2.4 GHz (Turbo Boost up to 3.4 GHz)
SYSTEM MEMORY	4 GB DDR4 RAM (up to 32 GB)
STORAGE DEVICE	128 GB M.2 SATA SSD (supports RAID 0/1/5/10)

DISPLAY

SIZE / RESOLUTION	15" TFT LCD (LED backlight) / 1024 x 768 pixels
BRIGHTNESS	350 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch (multi-touch)

I/O INTERFACE

USB PORT	6 x USB 2.0 1 x USB 3.0 (front panel)
SERIAL PORT	2 x DB9 (up to 4 x Serial ports)
VIDEO PORT	1 x HDMI 1.4 (optional)
AUDIO PORT	2 x built-in speakers 1 x 3.5 mm Mic-in/Line-out
CASH DRAWER PORT	1 x RJ12 (12 V / 24 V)
ETHERNET PORT	2 x RJ45 10/100/1000 Mbps

OPERATING SYSTEM

WINDOWS	POSReady 7 / 7 Pro / 10 IoT / 10 Pro
----------------	--------------------------------------

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	366 (W) x 495 (H) x 245 (D) mm 10 kg
CHASSIS MATERIAL	Die-cast aluminium
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	Operating: 0% to 80% Storage: 10% to 90% (non-condensing)
POWER CONSUMPTION	24 V / 5 A, internal power adaptor, 100-240 V, 50/60 Hz

MODEL OPTIONS

INTEGRATED CARD READERS	3-track MSR, RFID (125 kHz / 13.56 MHz), IC card reader, fingerprint reader
CUSTOMER DISPLAY	2-line VFD or 7" / 10" / 15" TFT LCD (optional touch)
INTEGRATED BARCODE READER	2D barcode reader
WIRELESS LAN	Integrated 802.11 b/g/n/ac + Bluetooth 4.1
COLOURED FRAME	Black (standard) White/Red/Green/Blue/Purple (special order)
COLOURED UNIT	Black (standard) Gold/Silver (special order)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

QLOGIK Technologies, Inc. | 3630 Peachtree Rd NE | Atlanta, GA 30326 USA
 Phone +1 (678) 974 2807 | Mobile +1 (678) 793 3481
 Web: www.qlogik.us Sales: info@qlogik.us

Quality – Safety – Versatility

QLOGIK